




## RETRACTING CLOTHESLINE GROUND SOCKET INSTALLATION INSTRUCTIONS

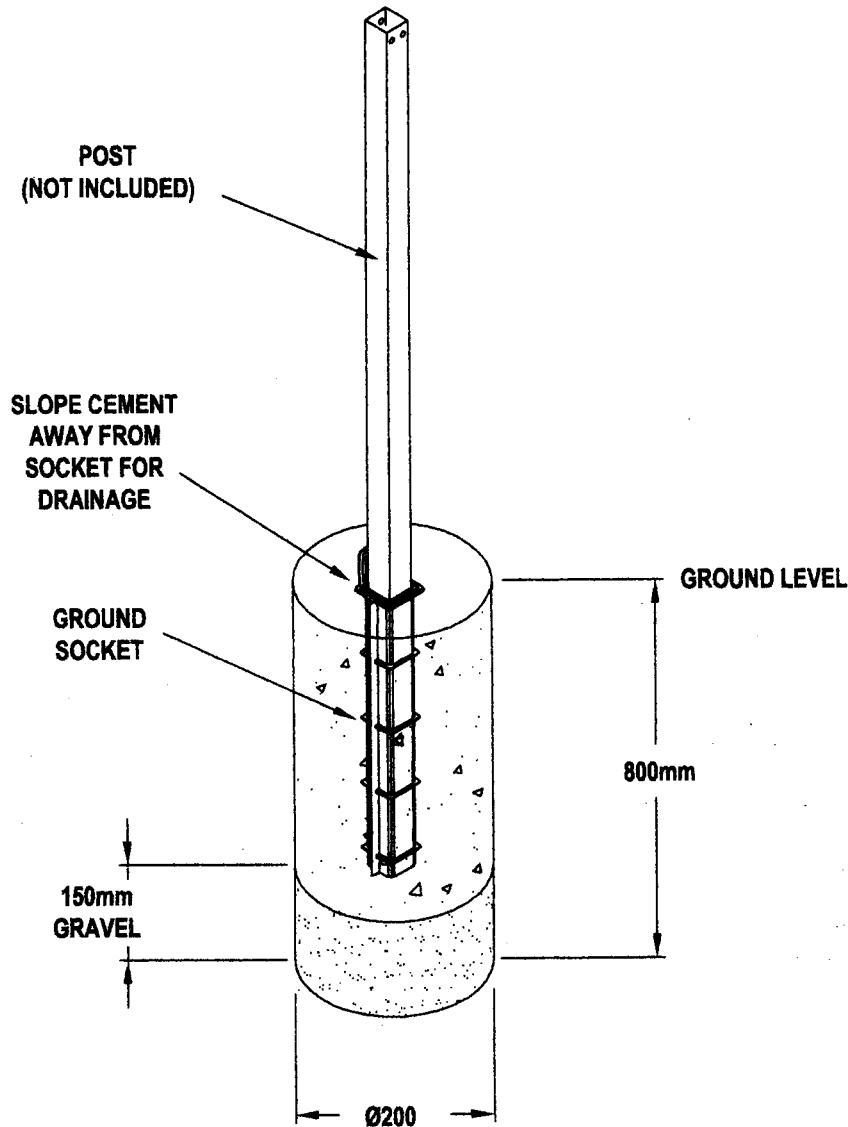

### IMPORTANT: READ THESE INSTRUCTIONS BEFORE ASSEMBLY AND USE

- Refer to your Retracting Clothesline Owners Manual for suitable site selection information.
- Dig a hole 200mm in diameter x 800mm deep and at the desired position for the post, from 4M minimum to 6.5M maximum from the mounting surface of the Clothesline. Ensure that the hole lines up with the centre of the cabinet.
- Place approx 150mm of coarse dry gravel in the bottom of the hole.
- Insert the Post into the Ground Socket and place into the hole. The flange of the ground socket must be just above the finished concrete.
- Make sure that the Post is vertical. Check with a spirit level and brace into position.
- Mix the concrete in the following proportions: 3 GRAVEL, 2 SAND, 1 CEMENT. The concrete should be damp enough to hold together when squeezed in the hand. Pour the concrete into the hole. Settle the concrete by pushing a thin stick into it several times.
- Float off the concrete making sure that it falls away from the Ground Socket for drainage.
- **Do not remove the Post until the concrete has set.**
- **Allow 48 hours for the concrete to set before use.**
  
- **NOTE:** The use of the Ground socket will set the wire approx 1.8M above ground level. To lower the line height, cut the required amount from the bottom of the post so that the top holes are 80mm above the head height of the user.

## HILLS GUARANTEE

HILLS INDUSTRIES LIMITED undertake that if any part of its manufacture has failed to operate correctly due to faulty workmanship or defective material, it will repair or replace the part free of cost for a period of twelve (12) months from the date of purchase of the article, given fair wear and tear. Evidence of unfair usage or incorrect adjustment by the owner will void this promise.

HILLS INDUSTRIES LIMITED will not be responsible for any costs in connection with freight or postage, or for the expenditure necessary to dismantle the article, replace the part in position and re-assemble the article.

This guarantee is in addition to any rights or remedies conferred on the consumer by the Trades Practices Act or state laws.

As a proudly Australian manufacturer, Hills is committed to providing you complete customer satisfaction. If you have questions about this product, or find there are missing or damaged parts. PLEASE CALL Hills on **1300 300 819** (cost of a local call) for assistance during normal business hours or visit **www.hills.com.au**

This product is designed to perform a specific task under established test loads and unauthorised attachments may produce stresses for which the design is not appropriate. The use of any addition or attachment with this product will void the warranty, unless the addition or attachment has Hill's specific approval or is sold as a Hills product.

*Design, specifications and colours are subject to change without notice.*

### HILLS INDUSTRIES LIMITED

A.B.N.35 007 573 417

Issue 09/02/05

**IMPORTANT:** Please retain this instruction sheet for spare parts identification.  
Record the following information from the carton for future reference.

Product Number: **FD** .....

Record date of Purchase:.....

Name and Location of Store:.....