




Hills® Supa. Fold

Ground Socket / Sleeve

Owner's Manual

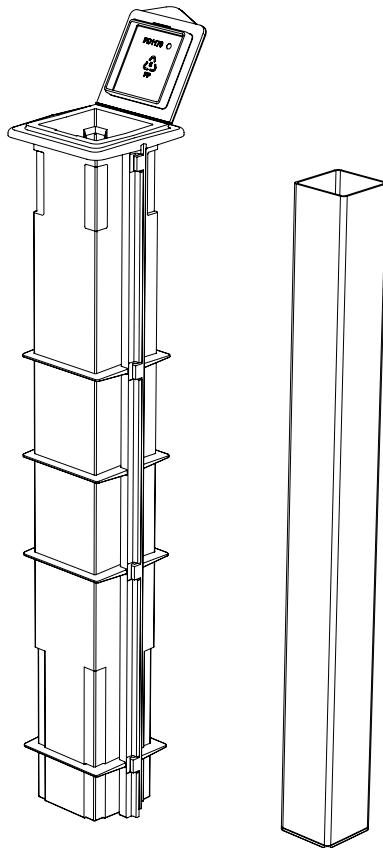

TO SUIT POST KIT MODELS:

Ground Socket - Suits Adjustable Post Kits

Ground Sleeve - Suits Fixed Post Kits

Congratulations

Congratulations on the purchase of your new **Hills Supa® Fold Ground Socket / Sleeve**.

It is important that you read this Owner's Manual thoroughly before installation and use. In this way you will benefit from all of the design features and enjoy safe use of the product.

Thank you for choosing Hills.

Warning

- Do not allow children or pets to swing on your Folding Frame Clothesline or items of laundry.
- Ensure when raising and lowering your Folding Frame Clothesline that bystanders (in particular children) are well clear.
- Do not use your Folding Frame Clothesline for any purpose other than to hang and dry washing.
- Do not use your Folding Frame Clothesline if parts are worn or damaged.
- Patents and registered designs apply to this product.
- Do not allow the frame to lower in an uncontrolled manner as damage or injury may result.

Consumer Advice

Please retain this Owner's Manual. Record the following information from the carton for future reference.

Product Number: FD.....

Date of purchase:.....

Name and location of store:.....

.....

Installing Posts using Ground Sockets or Ground Sleeves


Your Posts can be installed using Ground Sockets or Ground Sleeves, which allow future removal of the Posts if required. Both are available from Hills as optional accessories.

- A.** Having selected a suitable location, dig two holes approximately 200mm diameter x 600mm deep at hole centres to suit your product (see Post Hole Centre Chart on pg. 3). Place approximately 150mm of coarse gravel into the hole.
- B.** Place Posts in sockets/sleeves into the holes. Push the base of the sockets/sleeves into the gravel until they sit it approximately 5-10mm above ground level. We recommend that the Spreader Bar of your Supa® Fold is installed 50mm above your typical user head height, therefore the top of the Posts must be installed 30mm above user head height. We recommend adjustable posts are pre-set to the middle position prior to fixing in concrete.
- C.** Loosely fasten the Cross Brace to the top hole in each Post using the M8 x 75mm socket head bolts.
- D.** Support and check (using a spirit level and tape measure) that the Posts are parallel with each other and level, both vertically and horizontally.
- E.** Concrete Posts into position. Concrete should be damp enough to hold together when squeezed in your hand. Pack the concrete firmly and settle by poking with a thin stick. Slope the top surface of the concrete away from the Posts to provide drainage away from the Post.
- F.** Re-check Posts are parallel and level, then allow concrete to set thoroughly for at least 24 hours before final product assembly.


'Post Hole Centres'

Product	Centres (mm)
Supa® Fold 230 <i>Advantage</i>	2200
Supa® Fold 230	2200
Supa® Fold 210	2200
Supa® Fold 190	3350
Supa® Fold 120	2200

Ground Socket Installation

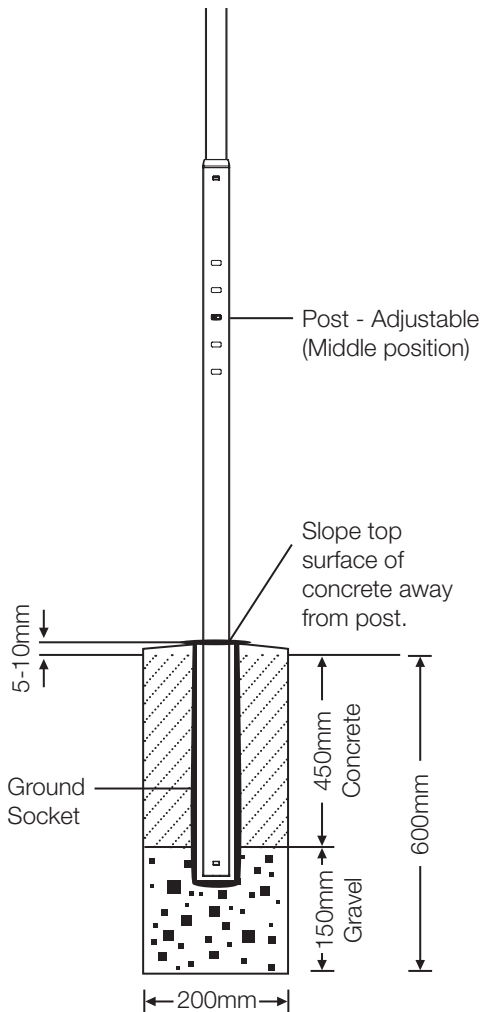

Ground Sleeve Installation

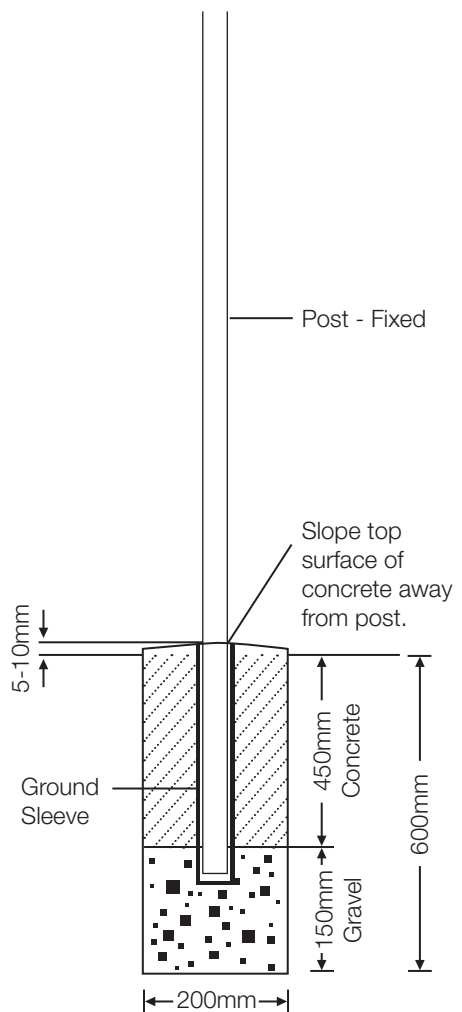

Hills Guarantee

Hills Industries Limited undertake that if any part of its manufacture has failed to operate correctly due to faulty workmanship or defective material, it will repair or replace the part free of cost for a period of TEN (10) years from date of purchase of the article, given fair wear and tear. Evidence of unfair usage or incorrect adjustment by the owner will void this promise.

Hills Industries Limited will not be responsible for any costs in connection with freight or postage, or for expenditure necessary to dismantle the article, replace the part in position and re assemble the article.

This guarantee is in addition to any rights or remedies conferred on the consumer by Trades Practices Act or state laws.

As a proudly Australian company we are committed to provide you complete customer satisfaction. If you have questions about this product or find there are missing or damaged parts please call Hills direct on **1300 300 819** (cost of a local call) for assistance during normal business hours.

Hills Industries Limited do not recommend the application of a 'canopy' on any of their outdoor dryer range.

Unless any addition or attachment to this product has Hills specific approval or is sold as a Hills product the warranty on this product is waived. The product is designed to perform a specific task under established test loads and unauthorised attachments may produce stresses for which the design is not appropriate.

Designs, specifications and colours are subject to change without notice.

Hills Industries Limited
A.B.N. 35 007 573 417

Issue August 2007
PD1231a



This product is designed and tested under a Quality System which complies with ISO 9001.

Made in China



For any assistance in Australia call **Hills Consumer Advice** on **1300 300 564** (cost of a local call) during normal business hours or visit **www.hills.com.au**

For any assistance in New Zealand call **09 262 3052** during normal business hours.